

# QuietCoat<sup>®</sup> 119

HIGHER PERFORMANCE, HIGHER RELIABILITY, LOWER COST SOUNDPROOFING SOLUTIONS.

## Noise reduction coating for high temperature uses

QuietCoat 119 is a sprayable, viscoelastic polymer that reduces noise and vibration with minimum weight, bulk and cost. Engineered specifically for coating nonporous materials including stainless steel, galvanized iron, aluminum and composite (reinforced plastic) materials, QuietCoat 119 is designed specifically for use in OEM and high temperature applications.


### QuietCoat 119 Benefits

- Typical noise reduction of 6dB to 20dB
- Ideal for oil pans, appliances, industrial machinery and other high temperature materials
- Easily applied with brush, roller, air gun, or airless sprayer
- Fully ROHS compliant
- Meets the highest industry flammability standards
- Fast-drying in under 20 minutes
- Non-toxic, water-soluble, ultra low VOCs
- Noise-damping results will continue to improve for 14 days
- Environmentally friendly, lab tested

### Product Specifications

<b>Model:</b>	<b>QuietCoat 119</b>
Density:	1,064 kg/m <sup>3</sup>
Active content:	>77 wt %
Weight:	Wet - 12.5 lbs/gallon Dry - 8.5 lbs/gallon
Viscosity:	4,000 centipoise
Compliance:	Low VOCs (<30 g/l)
Layer thickness:	0.02" - 0.06"
Drying time:	72 hours
Coverage:	40 - 80 sqft/gallon
Storage temp:	45° - 100° F Do not freeze

Available in 1 gallon, 5 gallon, 50 gallon and 250 gallon containers.

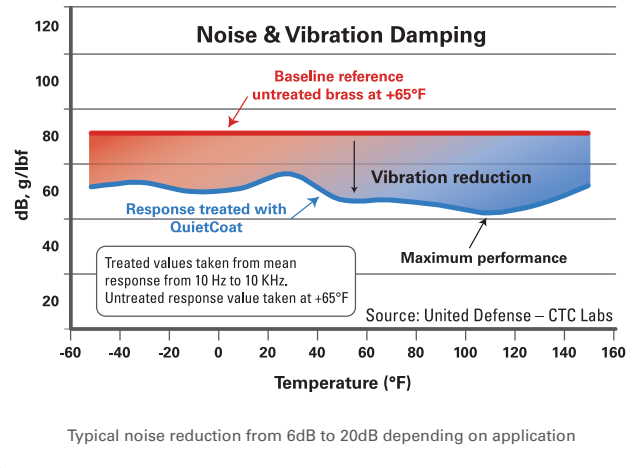

## Applications

- High temperature applications
- Oil pans
- Appliances
- Industrial machinery

