

Perfect for do-it-yourselfers and curved walls


QuietGlue is a high performance, viscoelastic compound for use in constrained layer damping applications. Perfect for do-it-yourself projects and curved walls, it can provide low cost soundproofing in remodels and new construction. This advanced polymer is non-toxic and anti-fungal. Typical projects that use QuietGlue achieve an 8-24 dB improvement in room-to-room noise reduction.

QuietGlue Benefits

- No VOCs, fully compliant in every state
- Nearly odorless and contains no ammonia
- Ideal for use with any kind of wood or drywall
- Easily applied with a tube*
- Tack-free in 1 hour, completely dry in 24 hours
- Noise-damping results will continue to improve for 14 days
- Environmentally friendly, lab tested



Product Specifications

Model:	QuietGlue 315
Color:	Yellow
Density:	1,030 kg/m ³
Solid content:	>82 wt %
Viscosity:	10,000 - 30,000 centipoise
Compliance:	Ultra low VOCs (25g/l)
Flash point:	Above 250° F (121° C)
Drying time:	24 hours
Coverage:	20 sqft/tube
Storage temp:	40° F - 100° F Do not freeze

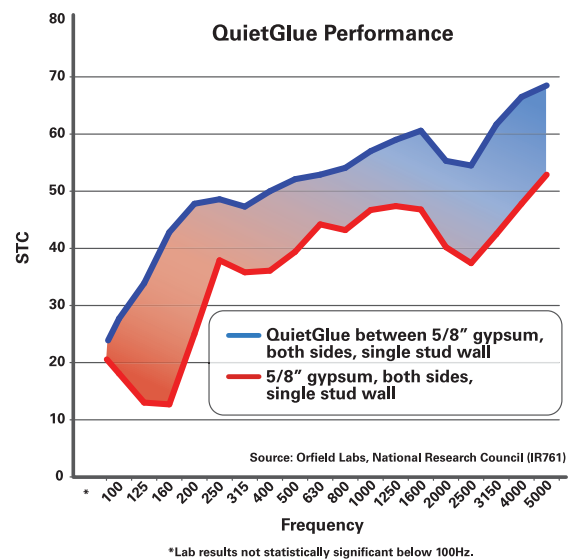

Applications

- Multi-family
- Commercial
- Home theaters
- Cabinets
- Recording studios
- Loudspeakers

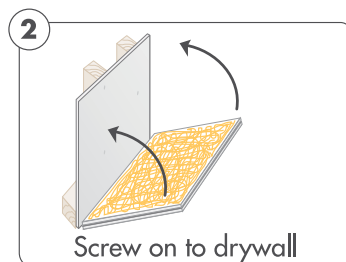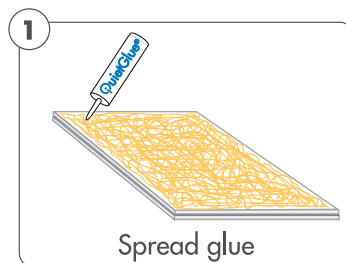

*A professional application system is recommended for use with 1 and 5 gallon buckets and 50 gallon drums.