


# QuietPutty™

## Application note QuietPutty QP-380

QuietPutty has been specifically designed to maintain the performance of acoustically rated walls.

QuietPutty is designed to acoustically seal fire rated electrical, phone and plumbing outlet boxes. No special skills or tools are required. To ensure adequate adhesion, all surfaces shall be clean and free of dust, grease, oil, loose materials, rust or other substances.

QuietPutty is non-toxic, chemically inert, and contains no hazardous materials.

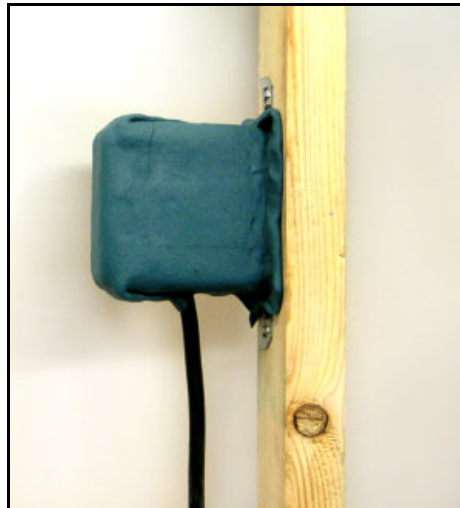


## Notes

*Use normal care and precaution when working with Quiet Solution products:*

- *Cleanup with soap and water.*
- *Follow all OSHA guidelines when completing any construction project.*
- *Dispose of excess QuietPutty in the same responsible manner as you would any building material.*

For further information see the Material Safety Datasheet (MSDS) on line at [www.QuietSolution.com](http://www.QuietSolution.com).



**Step 1: Remove the release paper from the QuietPutty pad.**



**Step 2: Inspect the fire rated outlet box to make sure it is properly installed and free of free of dust, grease, oil, loose materials, rust or other substances.**



**Step 3: Starting at side, align the QuietPutty pad to front edge of box and overlap onto the stud.**



**Step 4: Cut the QuietPutty pad to allow the pad to fit around conduits or cables.**



**Step 5: Pleat the extra material at the corners.**



**Step 6: Fold the pleated corners into place and firmly press the QuietPutty pad into place so that the entire surface of the back of the outlet box is covered.**